

Transient Voltage Suppressors for ESD Protection

ESD1.8V88D-CDN

Description


The ESD1.8V88D-CDN is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.



Feature

- ◆ 150 Watts Peak Pulse Power per Line (tp=8/20μs)
- ◆ Protects One Bidirectional I/O Line
- ◆ Low Clamping Voltage
- ◆ Working voltages : 1.8V
- ◆ Low leakage current
- ◆ IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ IEC61000-4-5 (LIGHTING) 18A (8/20μs)
- ◆ IEC61000-4-2(ESD):±30kV (air discharge)
±30kV (contact discharge)

Functional Diagram

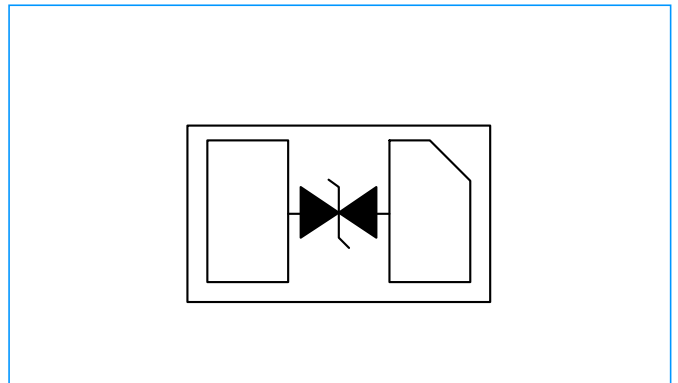

Applications

- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Notebooks, Desktops, and Servers
- ◆ Portable Instrumentation
- ◆ Peripherals
- ◆ Personal Digital Assistants
- ◆ Keypads, Side Keys, Audio Ports
- ◆ Digital Lines

Mechanical Data

- ◆ SOD-882/DFN1006 (1.0x0.6x0.5mm) Package
- ◆ Molding Compound Flammability Rating : UL 94V-O
- ◆ Weight 0.5 Milligrams (Approximate)
- ◆ Lead Finish : Lead Free

Mechanical characteristics

Symbol	Parameter	Value	Units
P _{PP}	Peak Pulse Power (tp=8/20μs waveform)	150	Watts
T _L	Lead Soldering Temperature	260 (10 sec.)	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C
T _J	Operating Junction Temperature Range	-40 to +125	°C

Transient Voltage Suppressors for ESD Protection

ESD1.8V88D-CDN

Electrical Characteristics(@25°C Unless Otherwise Specified)

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Reverse Working Voltage	V_{RWM}	--	--	--	1.8	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$;	2.3	--	--	V
Reverse Leakage Current	I_R	$V_{RWM}=1.8V$, $T=25^\circ C$;	--	--	0.5	μA
Positive Clamping Voltage	V_C	$I_{PP}=1A$, $T_P=8/20\mu s$;	--	--	3.6	V
		$I_{PP}=18A$, $T_P=8/20\mu s$;	--	--	8.5	V
Junction capacitance	C_J	$V_R=0V$, $f=1MHz$;	--	25	--	pF

Characteristic Curves

Fig1. 8 x 20 μs Pulse Waveform

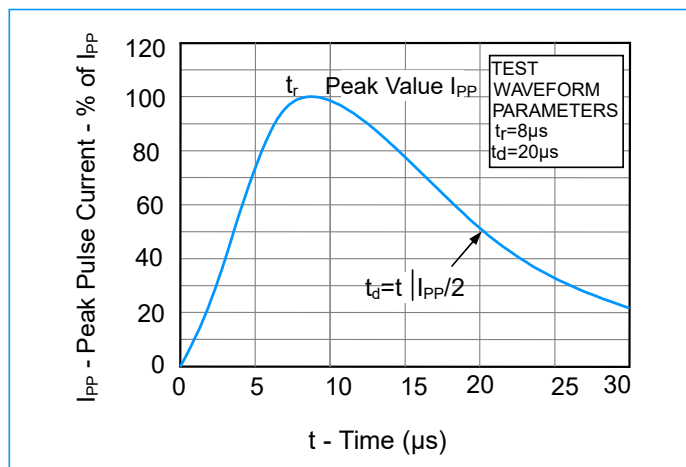


Fig2. Power Derating Curve

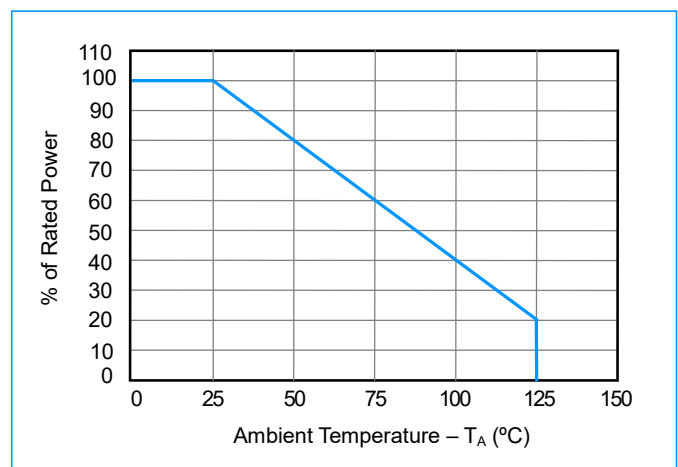


Fig3. ESD Pulse Waveform (according to IEC 61000-4-2)


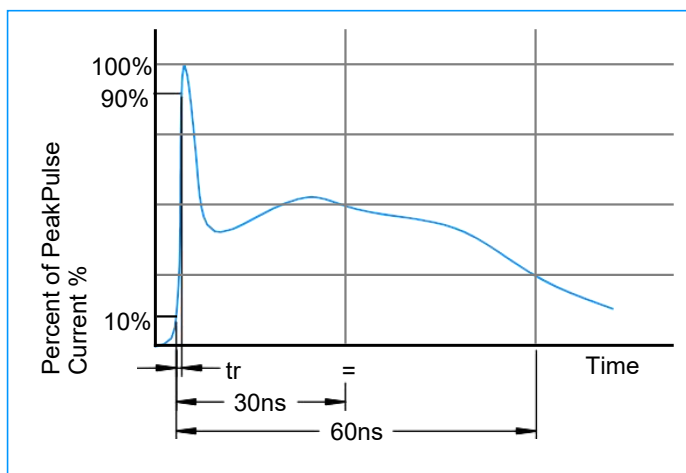


Fig4. Clamping Voltage vs. Peak Pulse Current

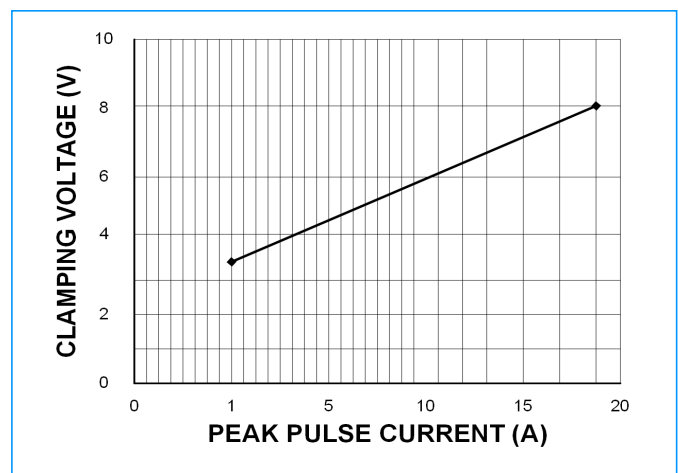


Transient Voltage Suppressors for ESD Protection

ESD1.8V88D-CDN



Characteristic Curves

Fig5. Typic Reverse Leakage vs. Temperature

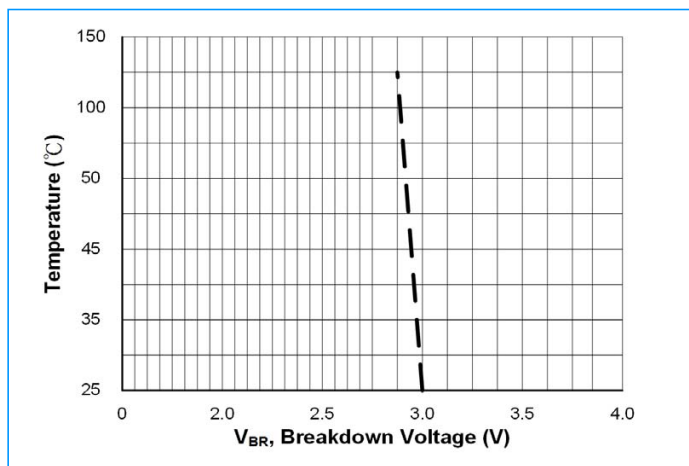

Transmission Line Pulse(TLP)

Transmission Line Pulse (TLP) is a measurement technique used in the Electrostatic Discharge (ESD) arena to characterize performance attributes of devices under ESD stresses. TLP is able to obtain current versus voltage (I-V) curves in which each data point is obtained with a 100ns long pulse, with currents up to 40 A. TLP was first used in the ESD field to study human body model (HBM) in integrated circuits, but it is an equally valid tool in the field of system level ESD. The applicability of TLP to system level ESD is illustrated in Figure 1, which compares an 8KV IEC 61000-4-2 current waveform with TLP current pulses of 8 and 16 A. The current levels and time duration for the pulses are similar and the initial rise time for the TLP pulse is comparable to the rise time of the IEC 61000-4-2's initial current spike. This application note will give a basic introduction to TLP measurements and explain the data sheet parameters extracted from TLP for SDI Technology's protection products.

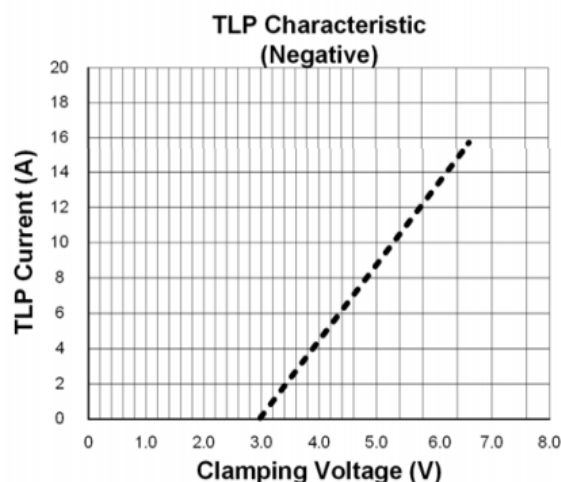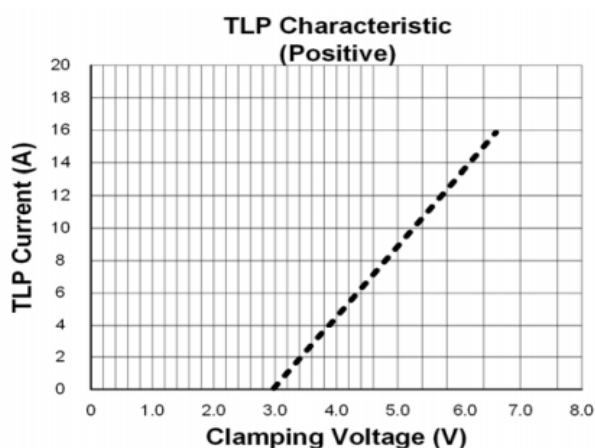


Transient Voltage Suppressors for ESD Protection



ESD1.8V88D-CDN

SOD-882/DFN1006 Package Outline&Dimensions

SOD-882/DFN1006

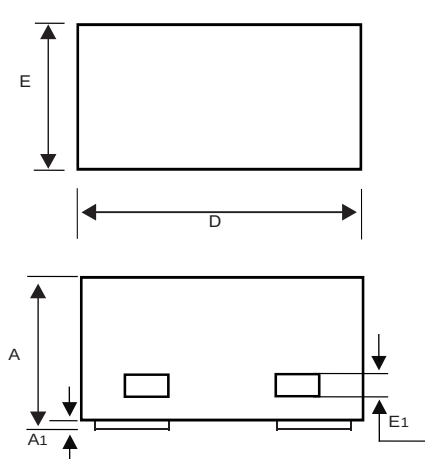

Suggested PAD Layout

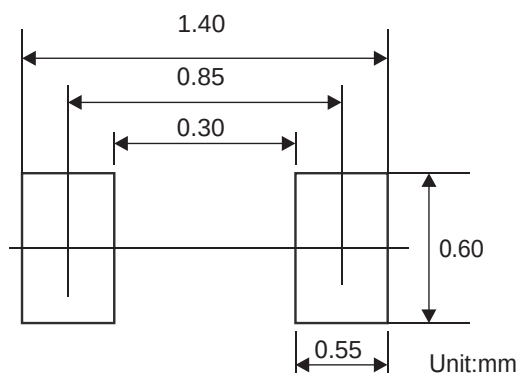

Symbol	Millimeters		
	Min	Nom	Max
A	0.450	0.500	0.550
A1	0	0.020	0.050
E1	0.013	0.063	0.113
D	0.900	1.000	1.100
E	0.500	0.600	0.700
e	0.65BSC		
L	0.150	0.250	0.350
b	0.400	0.500	0.600
L1	0.300	0.400	0.500

Ordering Information

Device	Marking	Package	Quantity	Reel Size
ESD1.8V88D-CDN	TD	SOD-882/DFN1006	12,000pcs/Reel	7 inch